




HANGZHOU FORLONG IMPEX CO., LTD.
FORLONG (GROUP) INTERNATIONAL TRADING CO., LTD.

WEB: www.forlongwheel.com

ADD: ROOM 907 NO. 6 BUILDING, YINHU INNOVATION CENTER,
NO. 9 FUXIAN RD., FUYANG, HANGZHOU 311422 ZHEJIANG CHINA

TEL: +86-571-63435933 FAX: +86-571-63436808

E-mail: hersey@forlonggroup.com

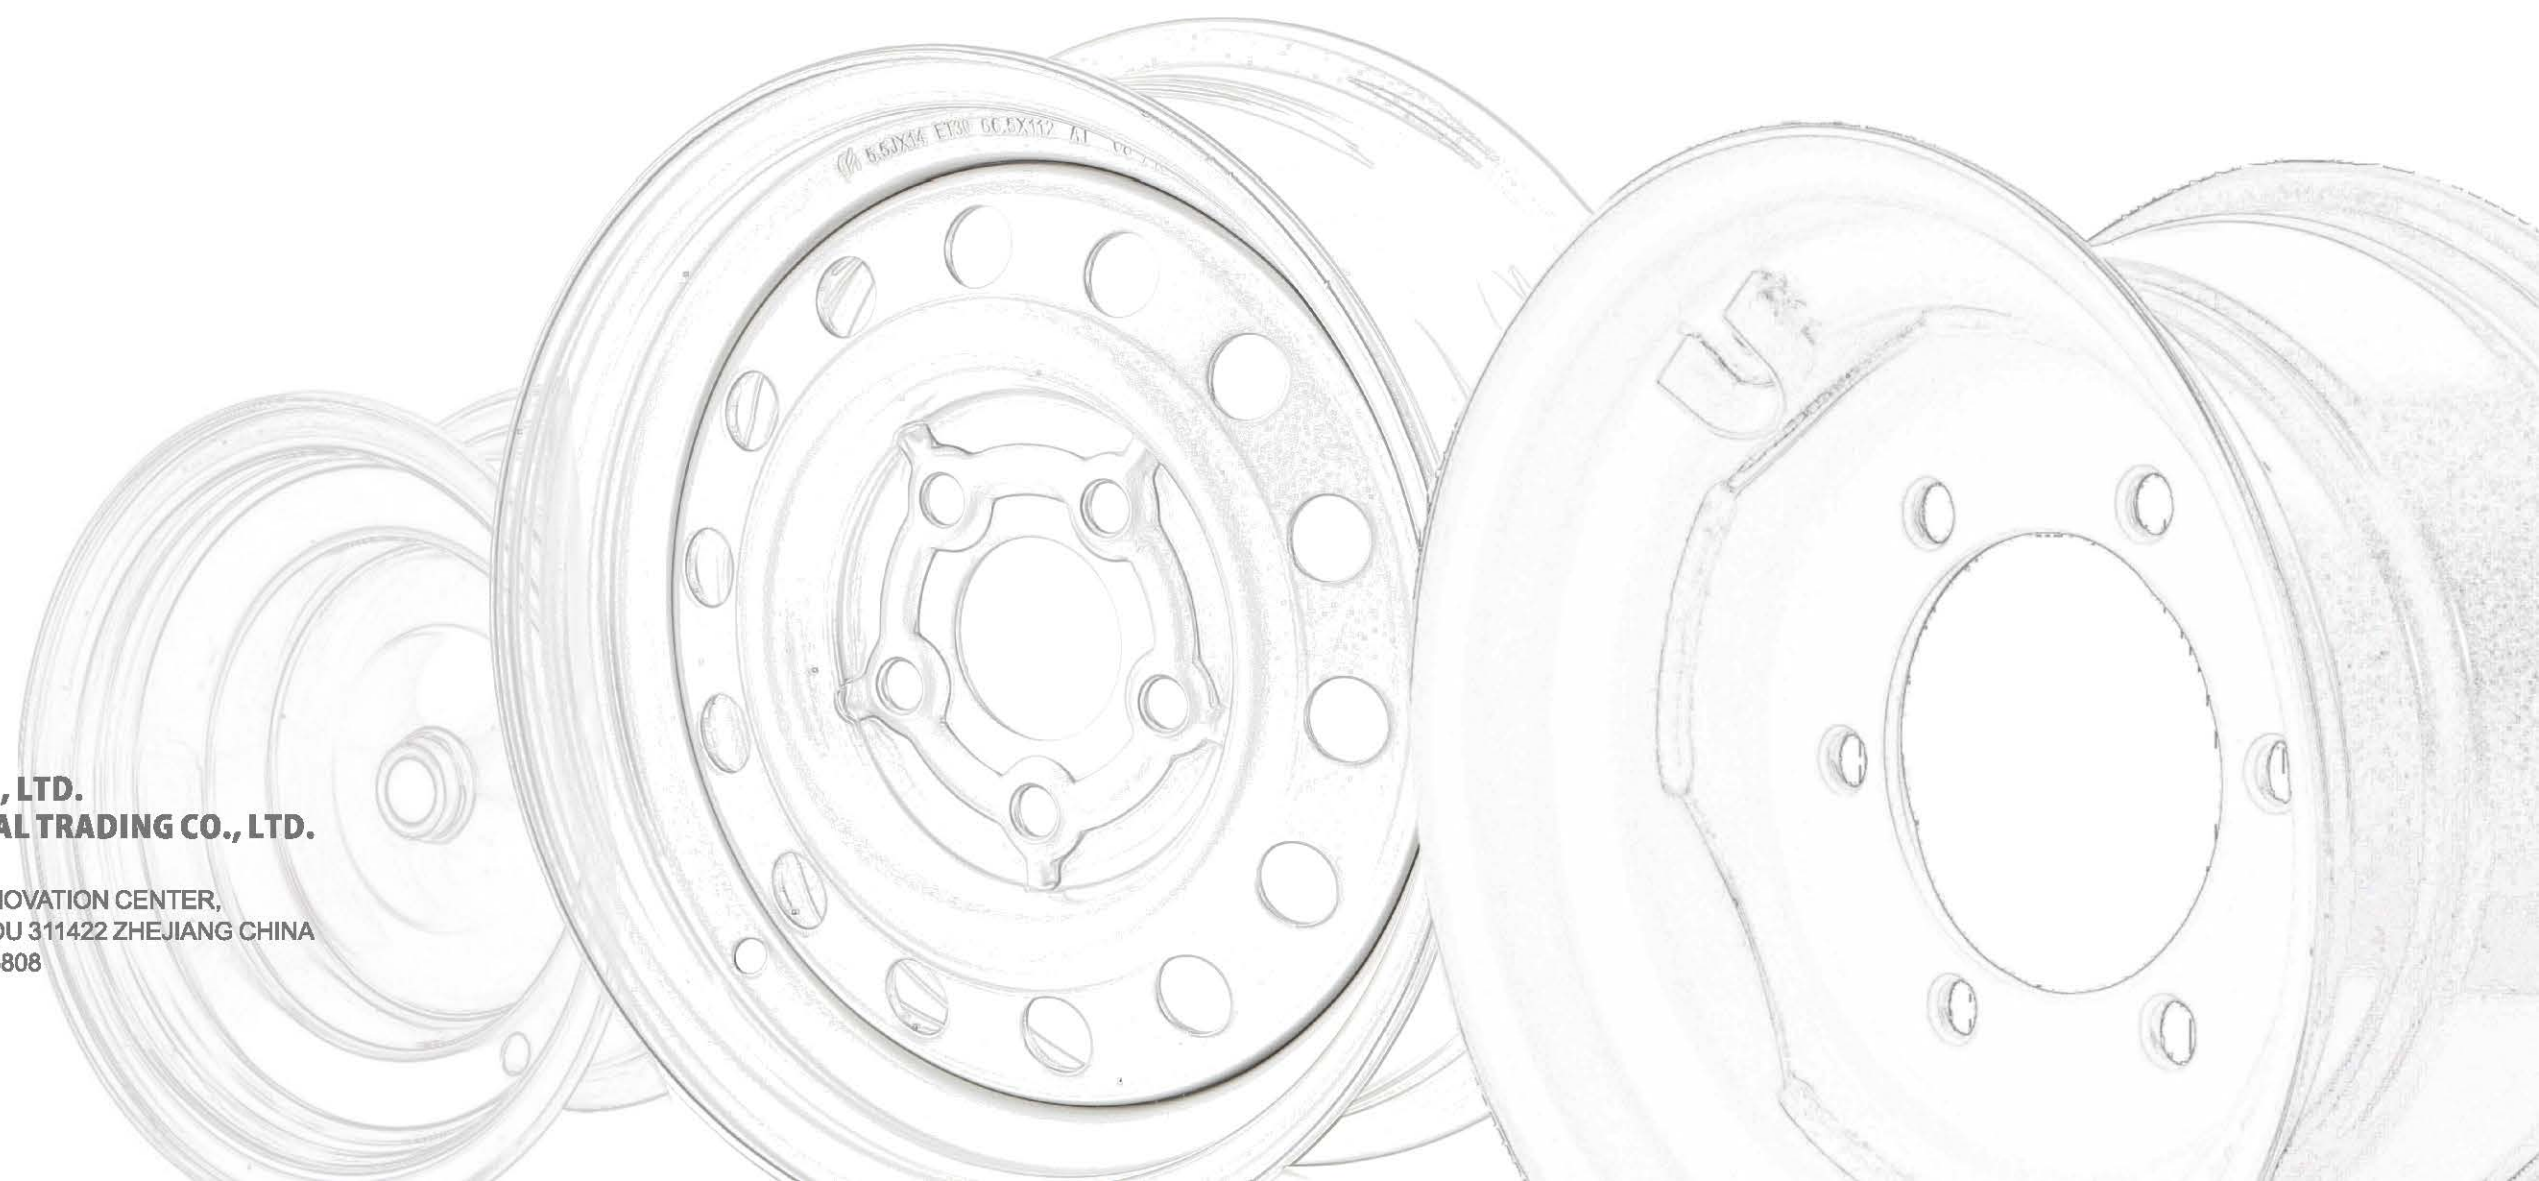

INDEX

Company Profile.....01

Certificates.....02

High speed European trailer wheel.....03



High speed American trailer wheel.....10



Agriculture wheel.....12



ATV wheel.....14



Agriculture, Lawn and Garden wheel.....17



Golf carts wheel.....20



Snowplough wheel.....21



Tool wheel.....22



High speed aluminum trailer wheel.....23



Stub axle.....24



PTO drive shaft.....25



Jockey wheel & Jack stand.....27



Other trailer parts.....30



Company Profile



Forlong Wheel is a professional wheel supplier for light trailers, agricultural implement equipments, ATV, go karts, club cars, golf carts, garden vehicles, snowplough etc, who has more than 10 years' experience for export. The annual production capacity is more than 1,000,000 pcs.

Products and service:

We have a high-efficiency for the producing & delivery system and a one-stop service for all vehicle parts servicing the light trailers, agricultural and industrial field, especially for the wheels complete with tires and trailer body parts (such as jockey wheel, jack stand, coupling, hinge, board latch, hook for board latch, floor holder, lamp etc.).

Customers:

Including top trailer and body builder manufacturers, trailer workshops and wheel distributors, as well as the agricultural and industrial companies throughout the world, of which Europe, South America and Southeast Asia are our main markets.

Quality:


As a TS16949 and ISO 9001:2015 registered firm, with strict quality control system & the operation flow, ensure that all the steel wheels conformed to the ETRTO norm, DOT and TÜV.

You are warmly welcome to open up the boundaries of communication. We synchronize with your ideal partner!




Certificates


ISO 9001

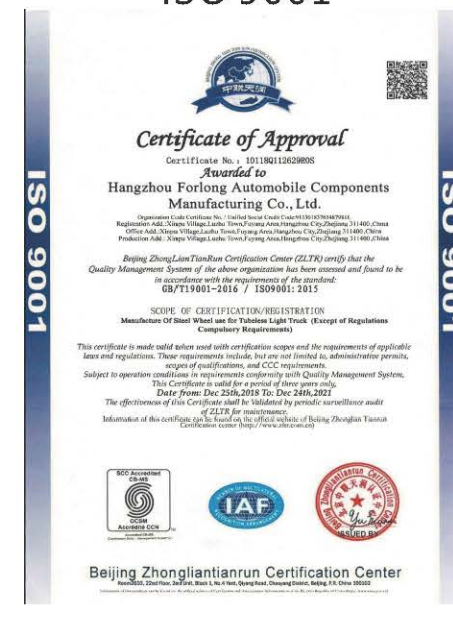


TÜV

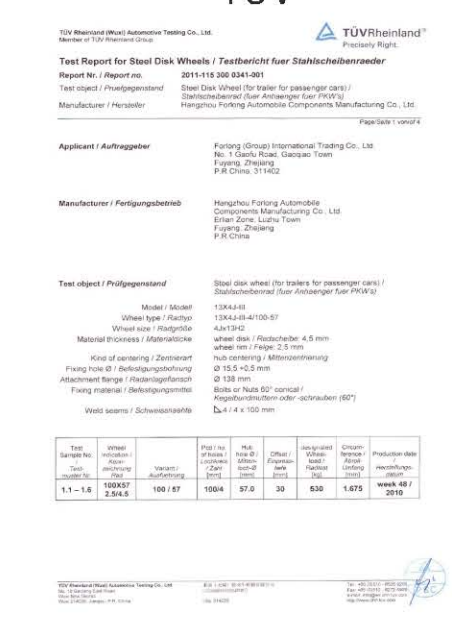



Bolt Hole Shape




Conical size




Spherical size R12



Spherical size R14



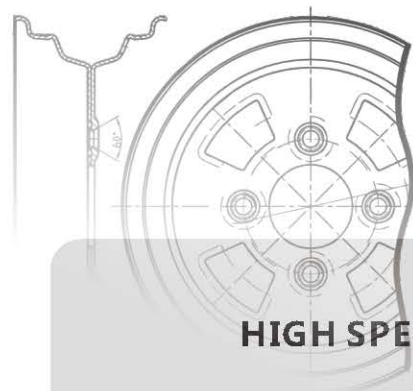

HIGH SPEED EUROPEAN TRAILER WHEEL & TYRE


Wheel Size	Assembled Tyre Size	Bolt Hole No.	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)	Load Capacity (100km/h)
2.50X8	4.80/4.00-8	4	95	62.5	0	300KGS
		4	98	58.5	0	300KGS
		4	100	60	0	300KGS
		4	101.6	66.7	0	300KGS
		4	115	85	0	300KGS
		4	115	85	0	300KGS
5.50X8	16X6.50-8 16X7.50-8 180/70R8	4	95	62.5	0	375KGS
		4	98	58.5	0	375KGS
		4	100	60	0	375KGS
		4	101.6	66.7	0	375KGS
		4	115	85	0	375KGS
		4	115	85	0	375KGS
		5	140	94	0	375KGS
7.00X8	18X8.50-8 18X9.50-8	4	95	62.5	0	425KGS
		4	98	58.5	0	425KGS
		4	100	60	0	425KGS
		4	101.6	66.7	0	425KGS
		4	115	85	0	425KGS
9.00X8	20X8.00-8 20X10.00-8	4	100	60	0	450KGS
		4	101.6	66.7	0	450KGS



MORE >>

HIGH SPEED EUROPEAN TRAILER WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole No.	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)	Load Capacity (140km/h)
3.00X10	4.50-10 5.00-10	4	95	62.5	0	400KGS
		4	98	58.5	0	400KGS
		4	100	60	0	400KGS
		4	101.6	66.7	0	400KGS
		4	115	85	0	400KGS
3.50X10	4.50-10 5.00-10 145R10 145/80R10	4	95	62.5	0	400KGS
		4	98	58.5	0	400KGS
		4	100	60	0	400KGS
		4	101.6	66.7	0	400KGS
		4	115	85	0	400KGS
		4	130	85	0	400KGS
4.50X10	165R10 175R10	4	98	58.5	0	400KGS
		4	100	60	0	400KGS
		4	115	85	0	400KGS
6.00X10	195/55R10 20.5X10-10	4	98	58.5	0 / -4	750KGS
		4	100	60	0 / -4	750KGS
		4	101.6	66.7	0 / -4	750KGS
		5	112	66.5	0 / -4 / 20 / 25	750KGS
		4	130	85	0 / -4	750KGS
		5	140	94	0 / -4	750KGS



HIGH SPEED EUROPEAN TRAILER WHEEL & TYRE


Wheel Size	Assembled Tyre Size	Bolt Hole No.	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)	Load Capacity (140km/h)
4.00JX12	155/70R12	4	100	57	0	475KGS
		5	112	66.5	30	475KGS
		4	115	85	30	475KGS
		4	130	85	30	475KGS
		4	139.7	95.25	0	650KGS
4.50JX12	155/70R12	4	100	57	30	675KGS
		5	112	66.5	0 / 20 / 30	900KGS
		4	130	85	0	675KGS
		4	130	85	30	900KGS
		5	140	94	0	900KGS
		5	140	94	30	900KGS
		5	165.1	115	0	900KGS
5.50JX12	145R12 155R12 165/70R12 175/70R12	5	112	66.5	30	900KGS
		4	130	85	0	900KGS
		4	130	85	30	900KGS
		5	140	94	0	900KGS
		5	140	94	30	900KGS
		5	165.1	115	0	1000KGS
		5	112	66.5	30	900KGS
6.00JX12	185R12	5	112	66.5	30	900KGS
		5	165.1	115	7	900KGS
7.00IX12	23x8.5-12	5	112	67	10	900KGS



MORE >>

HIGH SPEED EUROPEAN TRAILER WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole No.	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)	Load Capacity (140km/h)
4.00JX13	145R13 145/70R13 145/80R13 155/70R13 155/80R13 165/70R13 165/80R13 175/70R13	4	98	58.5	30	530KGS (TUV APPROVAL)
		4	100	57 / 60	30	500KGS
		4	100	57 / 60	30	530KGS (TUV APPROVAL)
		5	112	63	30	530KGS
		5	112	66.5	30	530KGS
		4	115	85	0	530KGS
		4	130	85	0	530KGS
		4	130	85	20	440KGS
		4	130	85	20	530KGS (TUV APPROVAL)
		5	140	94	30	530KGS
4.50JX13	155R13 165R13 175R13 165/70R13 165/80R13 175/70R13 185/70R13	4	98	58.5	30	675KGS
		4	100	57 / 60.5	30	675KGS (TUV APPROVAL)
		5	112	63	30	675KGS
		5	112	66.5	30	675KGS (TUV APPROVAL)
		4	115	85	0	675KGS
		4	130	85	0	675KGS
		4	130	85	20	675KGS (TUV APPROVAL)
		4	139.7	95.25	26	675KGS
		5	140	94	30	675KGS



HIGH SPEED EUROPEAN TRAILER WHEEL & TYRE


Wheel Size	Assembled Tyre Size	Bolt Hole No.	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)	Load Capacity (140km/h)
5.00JX13	175R13 185R13 175/70R13 185/70R13	4	98	58.5	30	750KGS
		4	98	60.5	30	750KGS
		4	100	54	35	750KGS
		4	100	54	52	750KGS
		4	100	57	30	750KGS
		5	112	66.5	30	750KGS
		4	115	85	0	750KGS
		4	130	85	0	750KGS
		4	130	85	20	750KGS
		5	140	94	30	750KGS
		5	140	94	30	750KGS
5.50JX13	175/70R13 185/70R13 195/50R13	4	98	58.5	30	900KGS
		4	100	57	30	900KGS
		5	112	66.5	30	900KGS
		4	115	85	0	900KGS
		4	130	85	0	900KGS
		4	130	85	20	900KGS
		4	139.7	95.25	32	900KGS
		5	140	94	30	900KGS
		5	165.1	115	7	900KGS
		5	165.1	115	7	900KGS
6.00JX13	195/50R13	5	112	66.5	30	900KGS
		5	165.1	115	7	900KGS



MORE >>

HIGH SPEED EUROPEAN TRAILER WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole No.	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)	Load Capacity (140km/h)
5.00JX14	175R14 185R14 175/70R14 185/70R14 195/70R14	4	98	58.5	30	950KGS
		4	100	57	30	950KGS
		4	100	56	35	950KGS
		5	112	63	30	950KGS
		5	112	66.5	30	950KGS
		4	130	85	0	950KGS
		4	130	85	20	950KGS
		5	140	94	0	950KGS
		5	140	94	20	950KGS
		5	140	94	30	950KGS
		5	170	135	110	1250KGS
		4	98	58.5	30	950KGS
		4	100	57	30	950KGS
		5	112	63 / 66.5	30	950KGS
5.50JX14	185R14 195R14 185/70R14 195/70R14 205/70R14	4	130	85	0	950KGS
		4	130	85	20	950KGS
		5	140	94	0	950KGS
		5	140	94	20	950KGS
		5	140	94	30	950KGS
		5	152.4	103	39	1050KGS
		6	205	161	-5	1300KGS
		6	205	161	-5	1300KGS
		6	205	161	-5	1300KGS
		6	205	161	-5	1300KGS
6.00JX14	205/70R14	6	205	161	-5	1300KGS



HIGH SPEED EUROPEAN TRAILER WHEEL & TYRE


Wheel Size	Assembled Tyre Size	Bolt Hole No.	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)	Load Capacity (140km/h)
5.50JX15	185R15 195R15	4	100	57	30	950KGS
		5	112	63	30	950KGS
		5	112	66.5	30	950KGS
		4	130	85	30	950KGS
		5	140	94	30	950KGS
		5	160	120	100	1350KGS
6.00JX15	205R15	4	100	57	30	950KGS
		5	112	63	30	950KGS
		5	112	66.5	30	950KGS
		4	130	85	30	950KGS
		5	140	94	30	950KGS
		6	205	161	0	1300KGS
5.00JX16	195/75R16	5	114.5	165.1	39.7	1150KGS
5.50JX16	205/75R16	5	115	165.1	33.4	1250KGS
6.00JX16	215/75R16	4	100	57	30	950KGS
		5	112	63	30	950KGS
		5	112	66.5	30	950KGS
		4	130	85	30	950KGS
		5	140	94	30	950KGS
		6	205	161	0/-5	1500KGS



MORE >>

HIGH SPEED AMERICAN TRAILER WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole No.	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)	Load Capacity (140km/h)
4.00JX12	5.00-12 135R12 145R12	4	101.6	70	0	475KGS
		4/5	114.3	60 - 84	0/15	475KGS
		5/6	139.7	90-110	-25/15	475KGS
		5	165.1	114.5	0	475KGS
5.50JX12	155R12	5	165.1	114.5	0	900KGS
6.00JX12	185R12	4	100	60	0	900KGS
		4	101.6	72	0	900KGS
		4/5	114.3	60 - 84	0/15	900KGS
		5/6	139.7	90-110	-25/15	900KGS
		5	165.1	114.5	0	900KGS
4.50JX13	155R13 165R13 175R13 165/70R13 165/80R13 175/70R13 185/70R13	4	100	63.5	0	750KGS
		4	101.6	68	0	750KGS
		4/5	108	70	0	750KGS
		4/5	114.3	60 - 84	0/15	750KGS
		4	139.7	95.5	25	750KGS
		5/6	139.7	90-110	-25/15	750KGS
5.00JX13	175R13 175/70R13 185/70R13	4/5	114.3	60 - 84	0/15	850KGS
		5/6	139.7	90-110	-25/15	850KGS
5.50JX13	175/70R13 185/70R13 195/50R13	4/5	114.3	60 - 84	0/15	900KGS
		5/6	139.7	90-110	-25/15	900KGS
		5	165.1	114.5	7	1050KGS




MORE >>

HIGH SPEED AMERICAN TRAILER WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole No.	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)	Load Capacity (140km/h)
4.50JX14	165R14 175R14 165/70R14 175/70R14	4/5	114.3	60 - 84	0/15	900KGS
		5/6	139.7	90-110	-25/15	900KGS
		6	205	161	0/15	900KGS
5.00JX14	175R14 185R14 175/70R14 185/70R14 195/70R14	4	100	63.5	0	900KGS
		4/5	114.3	60 - 84	0/15/45	900KGS
		5/6	139.7	90-110	-25/15	900KGS
		6	205	161	0/15	900KGS
5.50JX14	185R14 195R14 185/70R14 195/70R14 205/70R14	4/5	114.3	60 - 84	0/15	900KGS
		4	100	63.5	0	900KGS
		5	112	66.5	0	900KGS
		5/6	139.7	90-110	-25/15	900KGS
		6	205	161	0/15	900KGS
5.00JX15	175/65R15 185R15 195R15	4/5	114.3	60 - 84	0/15	950KGS
		5/6	139.7	90-110	-25/15	950KGS
5.50JX15	185R15 195R15	4/5	114.3	60 - 84	0/15	950KGS
		5/6	139.7	90-110	-25/15	950KGS
6.00JX15	205R15	5	112	76	0	950KGS
		4/5	114.3	60 - 84	0/15	950KGS
		5/6	139.7	90-110	-25/10/15/20	950KGS
7.00JX15	235/70R15	6	139.7	109	0	950KGS
		6	139.7	109	0	1250KGS
6.00JX16	225/75R16	8	165.1	130.8	0	1250KGS

AGRICULTURE WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole (mm)	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)
5.00X8	17X8-8	4	101.6	64	0
6.00X10	20X8-10	5	140	94.5	0
7.00X10	20X9-10	5	140	110	-23
		4	110	90	-23
7.00X12	23X8.50-12 10.0/80-12	4	98	58.5	0
		4	100	57	0
		5	112	66.5	0
		5	140	94	0
		6	205	161	0
		6	205	161	0
7.50X12	24X11-12	5	114.3	80	82
8.50X12	24X10-12	4	100	57	0
		5	112	66.5	0
		5	160	110	0
		8	180	160	+/-39
9.50X12	25X11-12 25X12-12	5	114.3	80	+/-30
		5	114.3	80	+/-25



AGRICULTURE WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole (mm)	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)
10.50X12	25X11-12 25X12-12	4	100	57	30
		4	100	60	+/-40
		6	152.4	118	+/-30
		5	112	66.5	+/-30
4JX13	145R13 155/70R13 155/80R13	4	95	62.5	0
		4	98	58.5	0
		4	130	85	0
4JX14	155R14	5	140	94	0
4.5JX14	165R14	6	205	161	0/15
5JX14	175R14 185R14	5	140	94	0
		6	205	161	0/15
5.5JX14	185R14 195R14	5	140	94	0
		6	205	161	0/15
6JX15	215/70R15	5	140	94	0
9.00X15.3	10.0/75-15.3 11.5/80-15.3 12.5/80-15.3	5	140	94	0
		6	205	161	-6 / 0
		5	203.2	150	0
		8	203.2	152	0
13X15.5	400/60-15.5	6	205	161	0



MORE >>

A.T.V WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole (mm)	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)
3.50X6	13X5.0-6	3	90	54	0
4.00X6	15X5.5-6	4	88.9	50.5	0
		4	90	55	0
4.50X6	145/70-6 15X6-6	6	90	50	0
		3	90	54	0
		3	79	55	0
4.50X7	18X7-7	4	90	55	0
		3	90	54	0
		4	110	90	0
		3	78	54	0
5.00X7	165/65-7 16X8-7	4	88	68	0
		4	110	90	0
5.50X7	165/65-7 16X8-7	4	110	90	0
		4	110	90	0
		4	90	70	0
3.75X8	16X6.5-8 16X7.5-8 480-8	4	110	90	0
		4	101.6	72	0
		5	114.3	72	0
5.00X8	480-8 18X6-8	3	90	54	13
		4	110	90	13
		4	88	68	13



MORE >>

A.T.V WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole (mm)	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)
5.375X8	18X7-8 16X6.5-8 16X7.5-8	4	101.6	72	0
		5	114.3	72	0
		4	137	118	0
5.50X8	19X7-8 20X7-8 21X7-8	4	100	60	13
		4	101.6	64	13
		4	110	light center hole	13
		4	108	65	-21
7.00X8	18X7.5-8 18X8.5-8 18X9-8 18X9.5-8 19X8.5-8	3	90	54	0
		4	160	90	0
		4	110	light center hole	0
		4	101.6	72	0
		4	101.6	72	25.4
		5	114.3	72	0
8.50X8	21X11-8	4	101.6	72	0
8.00X9	20X10-9 20X11-9	4	100	60	-35
		4	110	70 light center hole	-35
9.00X9	5.00-10	5	114.3	79.5	-35
4.00X10		5	114.3	72	0
5.00X10	23X7-10	4	155	125	0
5.20X10		4	110	90	0

A.T.V WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole (mm)	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)
5.50X10	21X7-10 22X7-10 23X7-10	4	88	68	0
		4	110	60	0/±25
		4	110	90	17
		4	145	115 light center hole	17
		4	110	light center hole	17
		4	136	110	17
6.00X10	23X7-10 23X8-10 24X9-10	4	140	110	-17
		4	101.6	72	0
		5	114.3	72	0
		5	140	94.5	0
		4	101.6	75	0
7.00X10	22X9-10	4	101.6	72	12.7
		5	114.3	72	12.7
		4	110	90	0
8.00X10	22X10-10 23X10-10 25X10-10	4	110	60	0/±25
		4	110	90	0
		4	136	110	0
		4	140	light center hole	0
7.00X12	21X9-12 225/80-12	5	114.3	72	0/±20
		4	101.6	64	0/±20



MORE >>

AGRICULTURE, LAWN AND GARDEN WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole (mm)	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)
3.25X6	13X5.0-6	3	90	71	0
4.50X6	145/70-6	4	90	55	0
4.33X8	5.00-8 18X7-8	5	140	94	0
4.00X9	6.00-9	5	140	94	0
6.00X10	21X8-10	4	110	60	0/±10
		5	114.3	80	0/±10
9.50X12	25X11-12 25X12-12	4	139.7	95	0/±35
		5	114.3	80	0/±35
Wheel Size	Assembled Tyre Size	Dimension - Size (mm)		Hub Configurations (Optional)	
		D	L		
2.15X4	3.00-4	35	94		Roller Bearing Ball Bearing Flange Ball Bearing Standard Keyway Grease Nippel Cap
2.50X4	3.00-4 11X4.00-4	16	82		
		19.1	72		
		20	60		
		20	75		
		35	70		
		35	52		
2.65X4	4.10/3.50-4	35	100		

AGRICULTURE, LAWN AND GARDEN WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Dimension - Size (mm)		Hub Configurations (Optional)	
		D	L		
2.50X5	4.10/3.50-5	20	80	Roller Bearing Ball Bearing Flange Ball Bearing Standard Keyway Grease Nippel Cap 	
		20	88		
25		80			
2.60X5		24	75		
3.00X5		35	69		
		35.3	115		
2.50X6	3.50-6 4.00-6	20	70		
		20	80		
		25	65		
		25	80		
3.25X6	13X5.00-6	19.1	80		
		20	55		
		20	80		
		25	51.5		
		25	65		
		25	80		
		35	83		
3.50X6	13X5.00-6	13.5	145.6		
4.00X6	15X5.50-6	35	110		
4.50X6	15X6.00-6 13X6.50-6	13.5	165		
		19.1	87		
		20	75		
		20	100		



MORE >>

AGRICULTURE, LAWN AND GARDEN WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Dimension - Size (mm)		Hub Configurations (Optional)
		D	L	
4.50X6	15X6.00-6 13X6.50-6	20	110	Roller Bearing Ball Bearing Flange Ball Bearing Standard Keyway Grease Nippel Cap
		25	61	
		25	90	
		25	100	
		25	180	
		35	74	
		35	83	
2.50X8	3.50-8 4.80/4.00-8	25	65	
		25	100	
		34.7	145	
5.375X8	16X6.50-8	20	88.9	
		25	61	
5.50X8	16X6.50-8 16X7.50-8	19.1	90	
		25	100	
		25	150	
		25.4	80	
6.18X8	20X7.00-8	25	84.9	
7.00X8	18X8.50-8 18X9.50-8	19.1	89	
		19.1	106	
		20	80	
		25	73	
		25	90	
		30	200	
4.00X9	6.00-9	30	67	
3.50X10	145R10	25	100	

GOLF CARTS WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole (mm)	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)
3.75X8	4.80-8 16X6.5-8 16X7.5-8	4	101.6	64	0
		4	101.6	71.6	0
		5	114.3	71.6	0
5.50X8	19X7-8 20X7-8	4	101.6	64	±21
		4	101.6	71.6	±21
		5	114.3	71.6	±21
7.00X8	18X8.5-8 18X9.5-8 19X9.5-8	4	101.6	64	0
		4	101.6	71.6	0
		5	114.3	71.6	0
3.50X10	5.00-10	4	101.6	64	0
		4	101.6	71.6	0
		5	114.3	71.6	0
5.50X10	19X7-10 21X7-10 23X7-10	4	101.6	64	±19
		4	101.6	71.6	±19
		5	114.3	71.6	±19
6.00X10	20.5X10-10	4	101.6	64	0
		4	101.6	72	0
		5	114.3	72	0/-10
		4	110	light center hole	0
7.00X10	205/50-10 205/70-10	4	101.6	71.6	-10
5		114.3	72	-10	
8.00X10		5	114.3	71.6	0
7.00X12	21X9-12 225/80-12	5	114.3	72	0/±20
		4	114.3	72	0/±20
		4	101.6	64	0/±20
		5	139.7	101.6	0/±20



MORE >>

SNOWPLOUGH WHEEL & TYRE


Wheel Size	Assembled Tyre Size	Dimension - Size (mm)		Hub Configurations (Optional)
		D	L	
2.42X4	3.00-4	19.1	96.5	Nylon Bush Bronze Flange Bush Roller Bearing Ball Bearing Press-in Key Standard Keyway Cap
2.60X6	4.10/3.50-6	19.1	150	
3.25X6		19.1	107	
		25.7	115.8	
		25.7	133	
		19.1	150	
		25.6	70.5	
4.00X6	13/5.0-6	19.1	108	
4.20X6		19.1	166	
4.50X6		25.6	76	
5.00X7	16X7-7	45	88	
3.75X8	5.00-8	14.5	74	
5.5X8	19X7-8	20.5	166	



TOOL WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Dimension - Size (mm)		Hub Configurations (Optional)
		D	L	
2.50X4	3.00-4 11X4.00-4	20	60	Nylon Bush Bronze Flange Bush Roller Bearing Ball Bearing Press-in Key Standard Keyway Cap
		20	63	
		20	75	
		20	80	
		25	60	
2.50X5	4.10/3.50-5 11X4.00-5	25	80	
		20	80	
		20	106	
		25	80	
		20	70	
2.50X6	3.50-6 4.00-6	20	80	
		25	51.5	
		25	65	
		25	74	
		25	80	
2.50X8	3.50-8 4.00-8 4.80-8	20	90	
		20	100	
		25	100	
		30	100	
2.90X8	4.00-8 4.80-8	19.2	72	
3.75X8	4.80-8 5.00-8	20	105	
		25	105	
400X70	18.5X3.15	52	55	



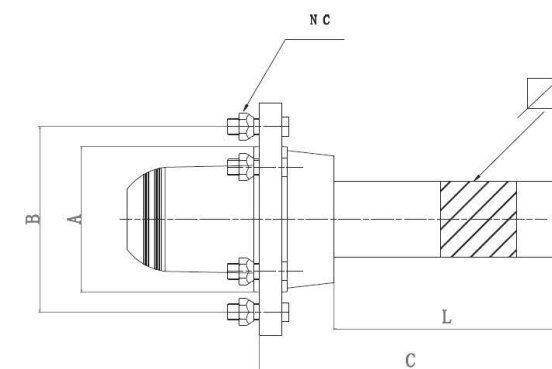

MORE >>

HIGH SPEED ALUMINUM TRAILER WHEEL & TYRE

Wheel Size	Assembled Tyre Size	Bolt Hole No.	PCD (mm)	Central Hole Diameter (mm)	Offset (mm)	Load Capacity (140km/h)
6.00X10	195/55R10	4	100	57.1	0	750KGS
		5	112	67.1	0	750KGS
5.00X13	175/70R13 185/70R13	4	100	57.1	30	500KGS
		5	112	67.1	30	500KGS
5.50X13	185/70R13 195/50R13	4	100	67.1	25	550KGS
		5	112	66.6	30	900KGS
		5	112	67.1	32	900KGS
5.50X14	185R14	5	112	66.6	30	950KGS
6.00X14	205R14	4	100	57.1	30	590KGS
		4	100	57.1	35	590KGS
		5	112	67.1	30	590KGS
		5	112	67.1	35	590KGS



STUB AXLE

Φmm	Bolt/ A-B (mm)	L(mm)	C(mm)	Load Capacity (KGS)
40	4 Hole 84-135	100/200/ Customization	240	950 KGS
40	4 Hole 58-98	100/200/ Customization	240	950 KGS
40	4 Hole 61-95	100/200/ Customization	240	950 KGS
40	4 Hole 56-100	100/200/ Customization	240	950 KGS
40	5 Hole 65-112	100/200/ Customization	240	950 KGS
40	5 Hole 93-140	100/200/ Customization	240	950 KGS
50	5 Hole 93-140	100/200/ Customization	250	2500KGS
50	6 Hole 160-205	100/200/ Customization	250	2500KGS
60	5 Hole 93-140	100/200/ Customization	250	3500KGS
60	6 Hole 160-205	100/200/ Customization	250	3500KGS
70	6 Hole 160-205	100/200/ Customization	250	4500KGS
80	6 Hole 160-205	100/200/ Customization	250	5500KGS




MORE >>

PTO DRIVE SHAFT


ITEM NO.	Series	 Cross		 Triangular Tube		 Spline Yoke	Protection/Cover	Power			Power Rating 1000tr./min			Max Torque
	T	D(mm)	L(mm)	Inner Tube(mm)	Outer Tube(mm)			Kw	Cv	Nm	Kw	Cv	Nm	Nm
FL-T1	T1	22	54	A:26.5	A:33	1 3/8"-Z6	Optional	12	16	210	18	25	172	320
				B:3.5	B:2.6	1 3/8"-Z21								
FL-T2	T2	23.8	61.2	A:29	A:36	1 3/8"-Z6	Optional	15	21	270	23	31	220	450
				B:3.5	B:3.4	1 3/8"-Z21								
FL-T3	T3	27	70	A:36	A:43	1 3/8"-Z6	Optional	22	30	390	35	47	330	640
				B:3.4	B:3	1 3/8"-Z21								
FL-T4	T4	27	74.6	A:36	A:43	1 3/8"-Z6	Optional	26	35	460	40	55	380	780
				B:4.5	B:3	1 3/8"-Z21								
FL-T5	T5	30.2	80	A:45	A:52	1 3/8"-Z6	Optional	35	47	620	54	74	520	1050
				B:4	B:3	1 3/8"-Z21								
FL-T6	T6	30.2	92	A:45	A:54	1 3/8"-Z6 ; 1 3/8"-Z21	Optional	47	64	830	74	100	710	1450
				B:4	B:4	1 3/4"-Z6; 1 3/4"-Z20								
FL-T7	T7	30.2	106.5	A:45	A:54	1 3/8"-Z6 ; 1 3/8"-Z21	Optional	55	75	970	87	118	830	1800
				B:5.5	B:4	1 3/4"-Z6; 1 3/4"-Z20								
FL-T8	T8	34.9	106.5	A:54	A:63	1 3/8"-Z6 ; 1 3/8"-Z21	Optional	70	95	1240	110	150	1050	2250
				B:4	B:4	1 3/4"-Z6; 1 3/4"-Z20								

Tube Type


G Series




S Series



L Series



T Series





MORE >>

JOCKEY WHEEL

ITEM NO.
Tube Size(Outer/Inner)
Vertical load (MAX.kg)
Surface treatment
Wheel Material
Wheel Size

FL35-100
35mm/28mm
100kg
Galvanization
Solid rubber & Sheet metal rim
6"

FL42-125
42mm/34mm
125kg
Galvanization
Solid rubber & Sheet metal rim
8"

FL48-150A
48mm/42mm
150kg
Galvanization
Solid rubber & Sheet metal rim
8"

FL48-150B
48mm/42mm
150kg
Galvanization
Pneumatic tyre & Metal rim
10"

FL48-500A
48mm/42mm
500kg
Galvanization
Plastic rim
6"

FL48-650A
48mm/42mm
650kg
Galvanization
Solid rubber & Sheet metal rim
8"

ITEM NO.
Tube Size(Outer/Inner)
Vertical load (MAX.kg)
Surface treatment
Wheel Material
Wheel Size

FL48-750A
48mm/42mm
750kg
Galvanization
Solid rubber & Sheet metal rim
9"/10"



FL48-900A
48mm/42mm
900kg
Galvanization
Double Plastic rim
6"

FL60-200P
60mm/54mm
200kg
Galvanization
Pneumatic tyre & Plastic rim
10"

FL60-250M
60mm/54mm
250kg
Galvanization
Solid rubber & Sheet metal rim
8"

FL60-350A
60mm/54mm
300kg-500kg
Galvanization
Solid rubber & Sheet metal rim
Folding wheels 9"

FL51-900A
51mm
900kg(2000LBS)
Galvanization
Double Plastic rim
6"



MORE >>

PROP STAND



ITEM NO.
Tube Size(Outer/Inner)
Vertical load (MAX.kg)
Surface treatment



FL-ST48-550A
48mm/42mm
550KG
Galvanization



FL-ST57-1850A
57mm/50mm
1850KG
Painting



FL-ST57-1850B
57mm/50mm
1850KG
Painting



FL-ST57-2850A
65mm/57mm
2850KG
Painting



ITEM NO.
Tube Size(Outer/Inner)
Vertical load (MAX.kg)
Surface treatment

FL-ST48-550B
48mm/42mm
550KG
Galvanization



FL-ST57-1200C
57mm/50mm
1200KG
Painting



FL-ST57-1200D
57mm/50mm
1200KG
Painting



FL-ST57-2000
57mm/50mm
2000KG
Painting

CLAMP



ITEM NO.	Tube Size(Outer)	Surface treatment
FL-CL35	35mm	Galvanization
FL-CL42	42mm	Galvanization
FL-CL48	48mm	Galvanization
FL-CL60	60mm	Galvanization

COUPLING HEAD (UNBRAKED)


Item NO.	(KG)	Size	Hole NO.	L (mm)
FL800-A	800	Φ50	2	90
FL800-B	800	Φ60	2	90
FL800-C	800	Φ70	2	90
FL800-D	800	□50	2	90
FL800-E	800	□60	2	90
FL800-F	800	□70	2	90
FL1500-A	1500	Φ70	3	90,110
FL1500-B	1500	□60	2	90
FL2000-A	2000	Φ60	3	90,110
FL2000-B	2000	Φ70	3	90,110



COUPLING HEAD

Item NO.	(KG)	Size	L (mm)
FL3000-A	3000	Φ35	40
FL3000-B	3000	Φ40	40
FL3000-C	3000	Φ45	40
FL3000-D	3000	Φ46	40
FL3000-E	3000	Φ50	40
FL3500-A	3500	Φ50	40






HINGE

Item NO.	Length (mm)
FL-FH-001	220
FL-FH-002	270
FL-FH-003	320
FL-FH-004	370
FL-FH-005	420
FL-FH-006	520



BOARD LATCH AND HOOK



FLOOR HOLDER (LASHING RING)



FASTENER



LAMP



TOWBALL



WINCH

Item NO.	Capacity (kg)	Belt/Metal Rope Size	Brake
FL-450BW	450	50mm*7m	/
FL-550BW	550	50mm*7m	/
FL-900BW	900	50mm*10m	/
FL-1100BW	1100	50mm*10m	/
FL-1100RW	1100	5.5mm*10m	/
FL-1360BW	1360	50mm*10m	/
FL-1360RW	1360	5.5mm*10m	/
FL-800BW	800	50mm*10m	Automatic
FL-800RW	800	4.5mm*10m	Automatic
FL-1200BW	1200	50mm*10m	Automatic
FL-1200RW	1200	5mm*10m	Automatic

